


# NAUGLER COUPLING

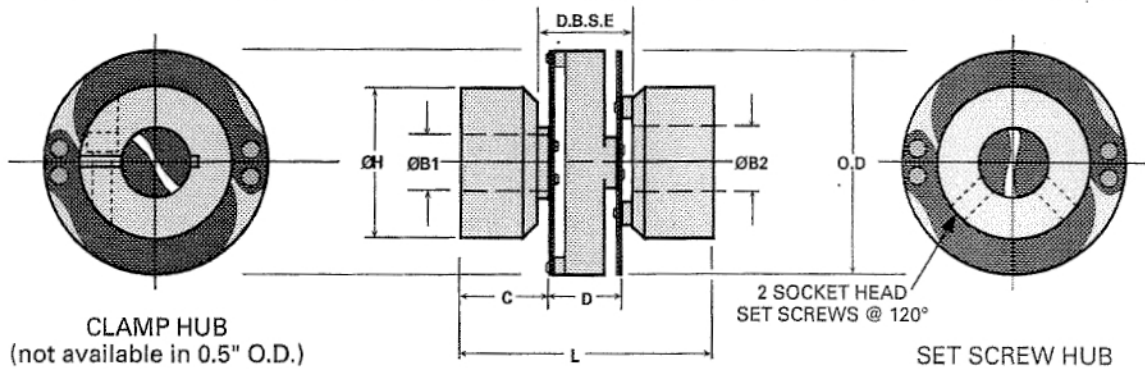

## INCH SERIES ALL DIMENSIONS IN INCHES

CLAMP HUB STOCK NUMBER	SET SCREW STOCK NUMBER	ØA +.0010	ØB +.0010	L	ØH	C	D	Ø.O.D.	D.B.S.E.*	MAX. WORKING TORQUE (IN OZ.)	MAX. PARALLEL MISALIGNMENT	MAX. ANGULAR MISALIGNMENT
	CLS-0	.0595 THRU .125		.688	.312	.220	.248	.50	.308	35	.015	8°
CLC-1	CLS-1	.1200	.1250	.889	.563	.300	.289	.750	.379	150	.018	
CLC-2	CLS-2	.1200	.1562									
CLC-3	CLS-3	.1200	.1875									
CLC-4	CLS-4	.1200	.2500									
CLC-5	CLS-5	.1250	.1250									
CLC-6	CLS-6	.1250	.1562									
CLC-7	CLS-7	.1250	.1875									
CLC-8	CLS-8	.1250	.2500									
CLC-9	CLS-9	.1562	.1562									
CLC-10	CLS-10	.1562	.1875									
CLC-11	CLS-11	.1562	.2500									
CLC-12	CLS-12	.1875	.1875									
CLC-13	CLS-13	.1875	.2500									
CLC-14	CLS-14	.2500	.2500									
CLC-22	CLS-22	.1875	.1875	1.210	.750	.440	.330	1.000	.450	200	.020	
CLC-23	CLS-23	.1875	.2500									
CLC-24	CLS-24	.2500	.2500									
CLC-25	CLS-25	.2500	.3125									
CLC-26	CLS-26	.3125	.3125									
CLC-15	CLS-15	.2500	.3125	1.823	1.000	.660	.503	1.500	.683	400	.030	
CLC-16	CLS-16	.2500	.3750									
CLC-17	CLS-17	.3125	.3125									
CLC-18	CLS-18	.3125	.3750									
CLC-19	CLS-19	.3750	.3750									
CLC-20	CLS-20	.3750	.5000									
CLC-21	CLS-21	.5000	.5000									

## METRIC SERIES ALL DIMENSIONS IN MILLIMETERS

CLAMP HUB STOCK NUMBER	SET SCREW STOCK NUMBER	ØA +0.03	ØB +0.03	L	ØH	C	D	Ø.O.D.	D.B.S.E.*	MAX. WORKING TORQUE (N-cm)	MAX. PARALLEL MISALIGNMENT	MAX. ANGULAR MISALIGNMENT
	CLSM-0	.0595 THRU 3.00		17.48	7.92	5.59	6.30	12.70	7.82	27	0.38	8°
CLC-1M	CLS-1M	3.00	3.00	22.58	14.30	7.62	7.34	19.05	9.63	115	0.45	
CLC-2M	CLS-2M	3.00	4.00									
CLC-3M	CLS-3M	3.00	5.00									
CLC-4M	CLS-4M	3.00	6.00									
CLC-5M	CLS-5M	4.00	4.00									
CLC-6M	CLS-6M	4.00	5.00									
CLC-7M	CLS-7M	4.00	6.00									
CLC-8M	CLS-8M	5.00	5.00									
CLC-9M	CLS-9M	5.00	6.00									
CLC-10M	CLS-10M	6.00	6.00									
CLC-11M	CLS-11M	6.00	7.00	30.74	19.05	11.18	8.38	25.40	11.43	160	0.51	
CLC-12M	CLS-12M	6.00	8.00									
CLC-13M	CLS-13M	7.00	7.00									
CLC-14M	CLS-14M	7.00	8.00									
CLC-15M	CLS-15M	8.00	8.00									
CLC-16M	CLS-16M	6.00	10.00	46.30	25.40	16.76	12.78	38.10	17.35	310	0.76	
CLC-17M	CLS-17M	6.00	12.00									
CLC-18M	CLS-18M	8.00	10.00									
CLC-19M	CLS-19M	8.00	12.00									
CLC-20M	CLS-20M	10.00	10.00									
CLC-21M	CLS-21M	10.00	12.00									
CLC-22M	CLS-22M	12.00	12.00									

\*D.B.S.E. = DISTANCE BETWEEN SHAFT ENDS